

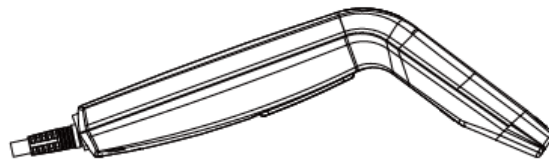


## Light-Weight High-Speed CCD Barcode Scanner

### CS-1800



- **Dimensions**

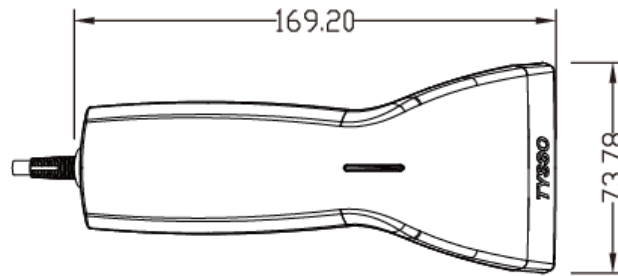

- Specifications**

<b>Model</b>		<b>CS-1800</b>
<b>General</b>		
Scan Rate	360 scans/sec	
Sensor Type	1500 Pixel Linear CCD	
Wavelength	590nm, Brilliant Yellow	
Depth of Field	0 ~ 50 mm (EAN13, 10.4mil, PCS90%)	
Width of Field	65 mm (Contact Max., EAN13, 10.4mil, PCS90%), 80 mm (Long Distance Max., EAN13, 15.6mil, PCS90%)	
Contrast Ratio	45%	
Resolution	0.1mm (4 mil)	
System Interface	Keyboard Wedge / RS-232 / USB	
Indicator	Buzzer & LED illumination	
Readable Bar Code Symbologies	Code 39/32, Full ASCII Code 39, Code 128, Code 11, Interleaved 2/5, Industrial 2/5/IATA, Matrix 2/5, China Postage, Code93, MSI/PLESSEY, Codabar/NW7, Code 4, EAN-8/JAN-13, UPC-A, EAN-13/JAN-13, ISBN/ISSN, RSS-14	
<b>Others</b>		
Power	5VDC ±5%	
Material	ABS	
Color	Black, White	
Shock Resistance	1.5m drop onto concrete	
Compliance	CE, FCC	
Weight	155 g	
Dimension (L x W x H:mm)	169.2 x 73.8 x 52.3	
Cable Length	180 cm	
Ambient Light	4500 Lux	
Operating Temperature	0°C~50°C	
Operating Humidity	20%-80% RH, non-condensing	
Storage Temperature	-20°C~60°C	
Storage Humidity	5%-95% RH, non-condensing	

